

HOW TO CREATE A PRINT-READY FILE: PACKAGING

The following instructions are designed to help you create a proper printing file. If still in doubt, please download the template, visit our web site at the FAQ section, activate the File Verification with an operator or call our Support Service.

1 FILE FORMAT

Our systems only process PDF format files to 1:1 scale - not password protected.

2 COLOURS

All files must be sent in CMYK (cyan, magenta, yellow and black), and possibly assigning the Fogra 39 colour profile. Images in RGB or in PANTONE colours will be converted to a standard separation profile.

3 RESOLUTION

File best resolution for printing large formats is between 250 and 300 dpi.

4 TEMPLATE

To achieve the correct graphics for these products, it is necessary to download the template from the web site, customise them with the proper graphics and save them in a PDF file, removing creasing and cutting lines, and keeping only the bleed area line.


WINDOW OPTION

In order to correctly produce the printing file for this option, you must download the dedicated template from the site. The area where the window will be placed will be indicated on the template.

5 EXTRA INFORMATION


The minimum printable point is 0,25.

PACKAGING

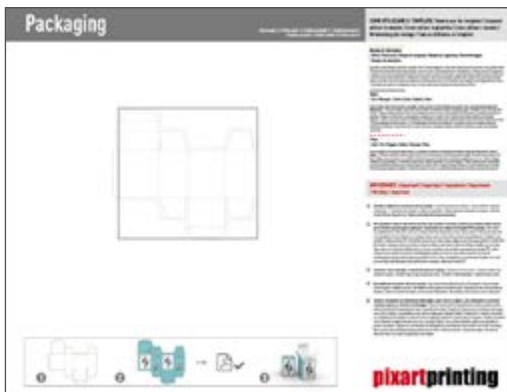

WRONG FILE

(the graphic has not been inserted and the "Template" layer hasn't been canceled).

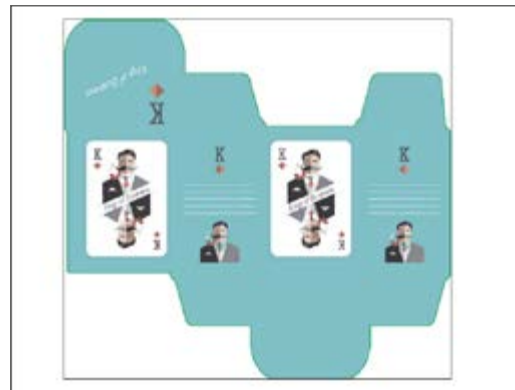

WRONG FILE

(the product has been re-sized).



CORRECT FILE

(only graphics and cutting line, NOT re-dimensioned).

PACKAGING WITH WINDOW



WRONG FILE

(the graphic has not been inserted and the "Template" layer hasn't been canceled).



WRONG FILE

(the product has been re-sized).



CORRECT FILE

(only graphics and cutting line, NOT re-dimensioned).