

## INSTRUCTIONS ON HOW TO CREATE A CORRECT FILE FOR DROP DISLAY - BANDEROLE

The following instructions are designed to help you create a proper printing file. If still in doubt, please download the template, visit our web site at the FAQ section, activate the File Verification with an operator or call our Support Service.

### 1 FILE FORMAT

Our systems only process PDF format files to 1:1 scale - not password protected.

### 2 COLOURS

All files must be sent in CMYK (cyan, magenta, yellow and black), and possibly assigning the Fogra 39 colour profile. Images in RGB or in PANTONE colours will be converted to a standard separation profile.

### 3 RESOLUTION

File best resolution for printing large formats is between 100 and 150 dpi.

### 4 TEMPLATE

To correctly produce the printing file for these products, you must download the template from the site, insert the graphic and save the PDF and delete the seam and cutting, keeping only the bleed margin. Remember not to edit the scale of the design, re-size the template or edit nor use the plain shade assigned to the lines on the "Template" and "Bleed" layers.

### 5 GRAPHIC


It is recommended that you insert any important information within the seam line. See image below.

### 6 BAND


It is possible to colour in the side band. We recommend that you don't insert important information as it may not correspond with the flag's graphic.

### 7 EXTRA INFORMATION


The minimum printable point is 0,5.

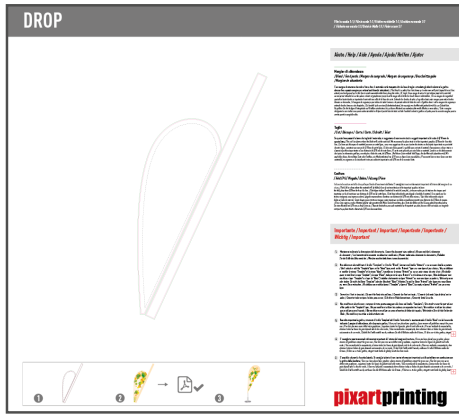


Wrong file (the graphic has not been inserted and the "Template" layer hasn't been canceled").

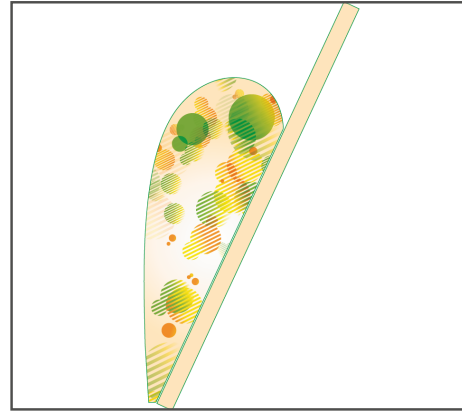

Wrong file (the product has been re-sized).

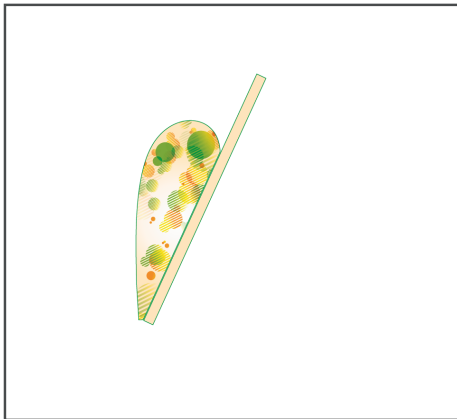

Correct file (only graphics and cutting line, NOT re-dimensioned).

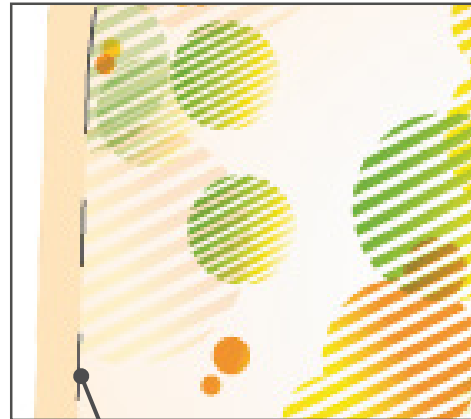

Seam. This line helps you to understand up to where it is possible to place texts or images, avoiding them from being hidden by the side band.