

INSTRUCTIONS ON HOW TO CREATE A CORRECT FILE FOR FOLDING SCREEN

The following instructions are designed to help you create a proper printing file. If still in doubt, please download the template, visit our web site at the FAQ section, activate the File Verification with an operator or call our Support Service.

1 FILE FORMAT

Our systems only process PDF format files - not password protected.

2 TEMPLATE

During the customisation phase of sizes on the web site, our system automatically creates a PDF template. We recommend to download file, add your own graphic, eliminate all guide lines except for the red and black ones and save it again in PDF. This way the saved file will be correct. Be careful not to place graphics in the bleed area, as they will not show on the finished product.

3 COLOUR

The same colour can appear slightly different depending on the printing media. This is due to the material physical composition. All the colours are in CMYK (Cyan, Magenta, Yellow and Black) with the printing profile in Fogra 39. Images in RGB or with PANTONE colours shall be automatically converted with the standard separation profile.

4 RESOLUTION


The best resolution for the printing file is between 100 and 150 dpi.

5 ADDITIONAL INFORMATION

Minimum printing line weight is 0.5pt.

6 MARGINS AND BLEED AREA




Rigid media require a PDF file in 1:1 scale + 5 mm bleed area on each side.
Distance of texts from cutting border must be 3 mm.

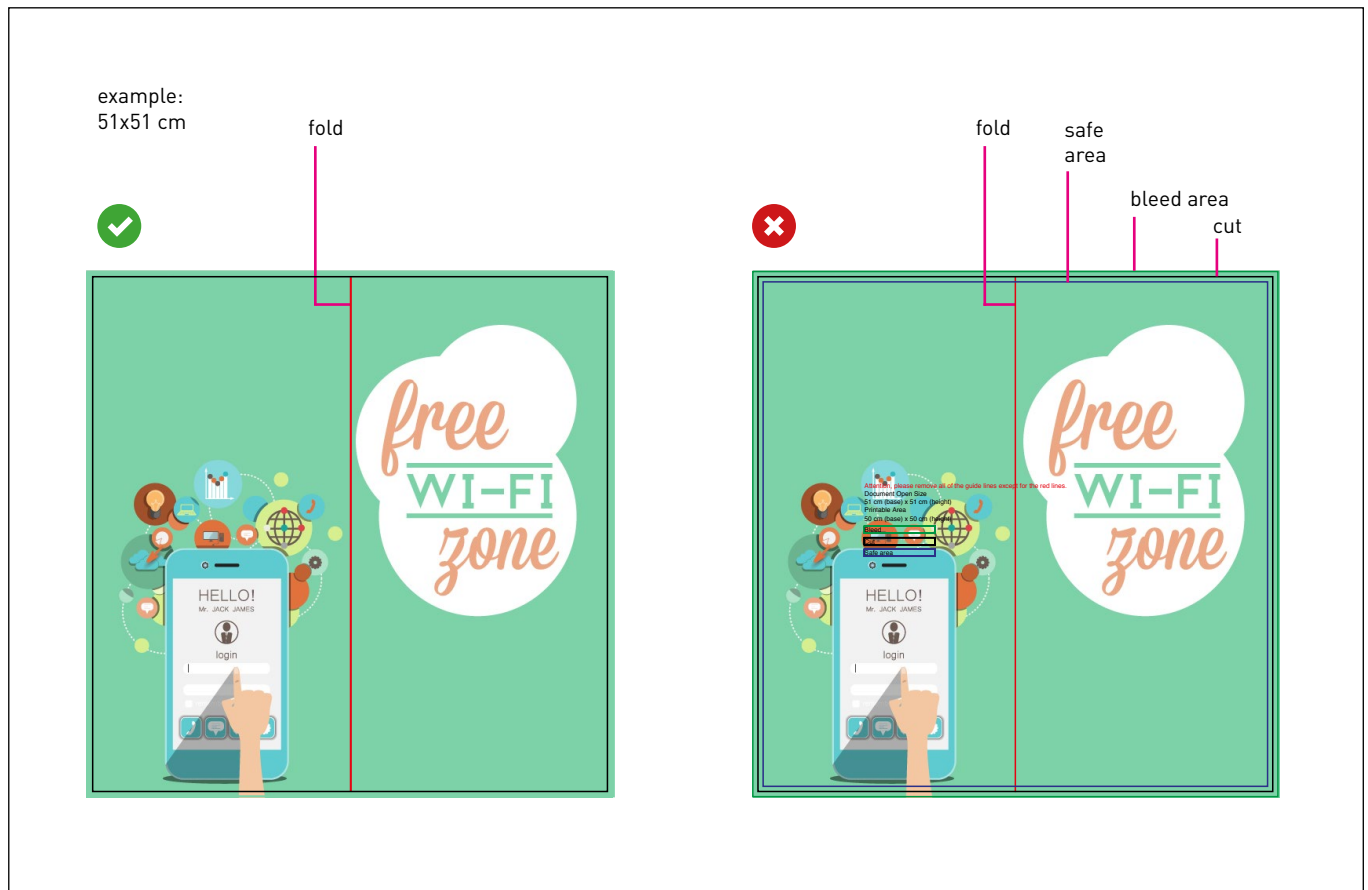

7 FOLD

The fold divides the screen into three equal parts and the distances are fixed on the template.
Una volta personalizzate le dimensioni, scarica il template per verificare la posizione delle pieghe (indicate con linee rosse verticali) ed inserisci la tua grafica.
Il pannello potrà essere stampato solo fronte ma piegato in entrambi i lati.

The recommended configurations are:

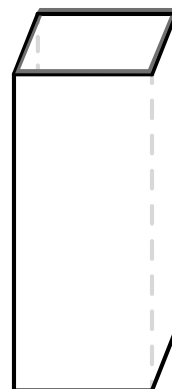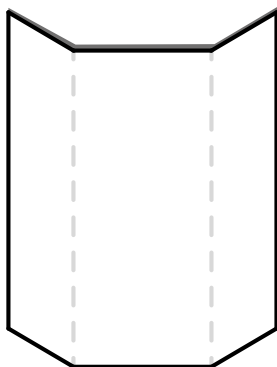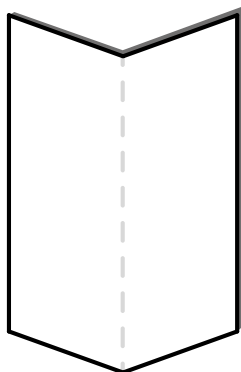

It is also possible to fold the screen in these other options:

